
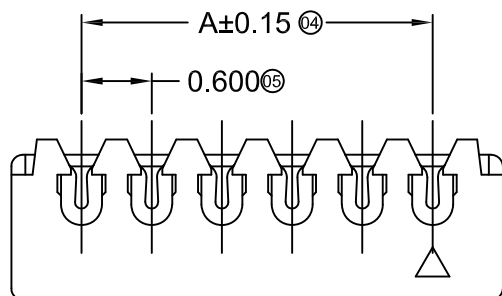
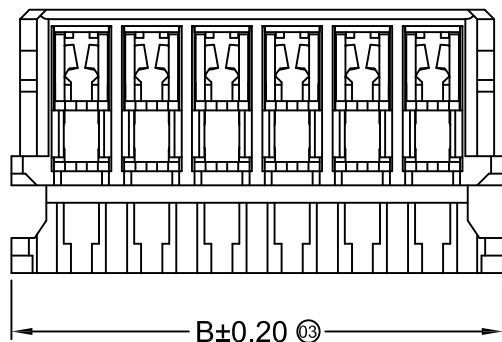
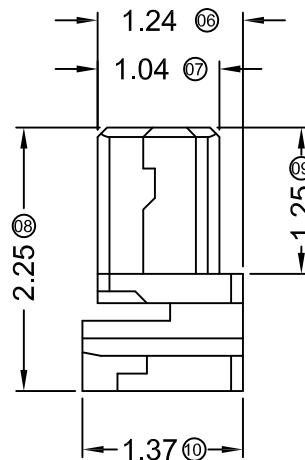
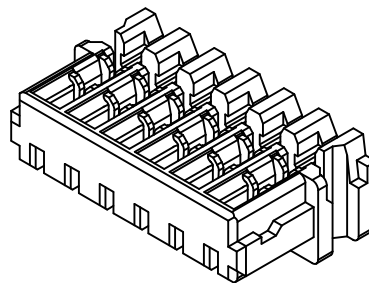


RoHS

0.08±0.05 ①

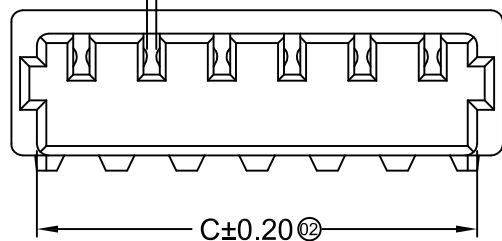

■ Specifications :

- Voltage rating: 30V AC / DC
- Current rating: 0.2A AC / DC
- Withstanding voltage: 200V AC/minute
- Temperature range: -25° ~+85°
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤30mΩ
- After environmental testing: ≤40mΩ
- Material(Terminal):Phosphor Bronze
- Wire Range:AWG#36/AWG#34
- Insulation O.D.:0.32mm(Max)
- Mates With GYA Wafer: 0600W

0600 H I-XX X- LP XX HF

① ②③④⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② Category: H-HSG
- ③ Welding Board Angle: I-HSG+hardware
- ④ Row No.-Pin No.: XX-Single row
- ⑤ Plating style: Blank-Tin plating; G-Gold Flash G03-Gold 3u"
- ⑥ Material: LP-LCP 94V-0
- ⑦ Color: Blank-Natural color Black
- ⑧ HF-Halogen free



Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	AB		C		AB		C
02	0.60	1.80	1.35	12	6.60	7.80	7.35
03	1.20	2.40	1.95	13	7.20	8.40	7.95
04	1.80	3.00	2.55	14	7.80	9.00	8.55
05	2.40	3.60	3.15	15	8.40	9.60	9.15
06	3.00	4.20	3.75	16	9.00	10.20	9.75
07	3.60	4.80	4.35	17	9.60	10.80	10.35
08	4.20	5.40	4.95	18	10.20	11.40	10.95
09	4.80	6.00	5.55	19	10.80	12.00	11.55
10	5.40	6.60	6.15	20	11.40	12.60	12.15
11	6.00	7.20	6.75	22	12.60	13.20	12.75





DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL
1						
2						
3						
4						

GENERAL TOLERANCE
X ±0.30
XX ±0.20
XXX ±0.10
PROJECT
Yangzhengguo

GYA 东莞市国亚电子有限公司 Dong Guan Guo Ya Connectors co., Ltd.			
APPROVAL	CHECK	DRAWN	DATA
Yangzhengguo	Yangzhengyi	Lvtiansheng	2016/08/26

PART NO. 0600HI-XXX-LPHF			
TITLE 0.60mm IDC Style Connectors			
UNIT	SCALE	NUMBER	REV
MM	1 : 1	A-198	A0

RoHS

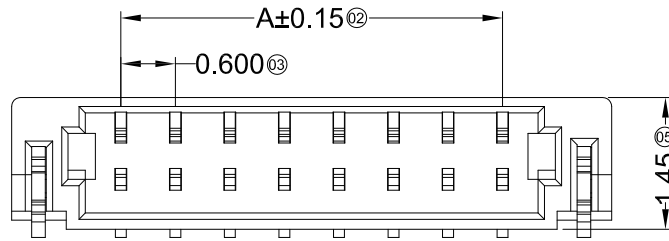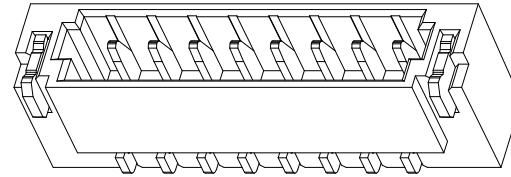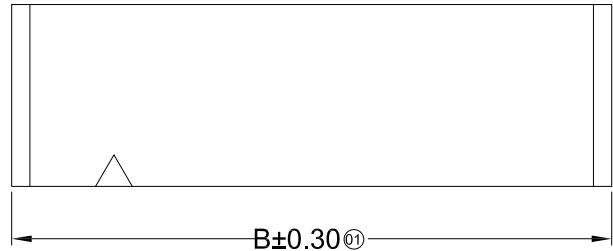


Specifications :

- Voltage rating: 30V AC / DC
- Current rating: 0.2A AC / DC
- Withstanding voltage: 200V AC/minute
- Temperature range: -25° ~+85°
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤30mΩ
- After environmental testing: ≤50mΩ
- Material(Pin): Phosphor Bronze
- Material(Solder Tabs): Brass
- Finish(Solder Tabs): Matte Tin
- Mates With GYA Housing: 0600HI

0600 W R S - XX HF - XX XX XX

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Category: W-wafer
- ③ Welding Board Angle: R-90°
- ④ Welding Way: S-SMT
- ⑤ Row No.-Pin No. : XX-Single row
- ⑥ Special NO.: HF-Halogen Free
- ⑦ Material: LP-LCP 94V-0
- ⑧ Planting Category: V01-All Gold Flash
- ⑨ Color: Blank-Black color

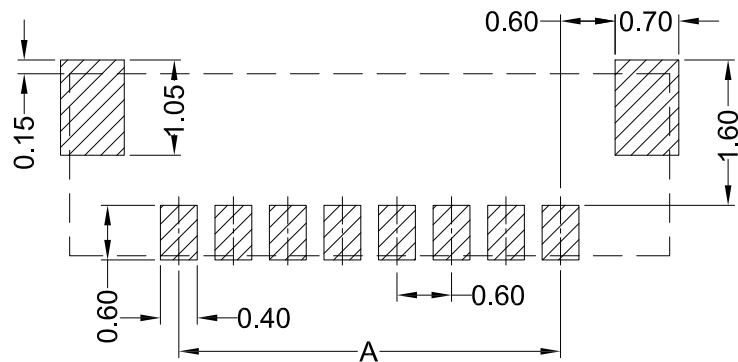

Recommended P.C.B Layout
General Tolerance ±0.05



Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	AB			AB	
02	0.60	3.00	12	6.60	9.00
03	1.20	3.60	13	7.20	9.60
04	1.80	4.20	14	7.80	10.20
05	2.40	4.80	15	8.40	10.80
06	3.00	5.40	16	9.00	11.40
07	3.60	6.00	17	9.60	12.00
08	4.20	6.60	18	10.20	12.60
09	4.80	7.20	19	10.80	13.20
10	5.40	7.80	20	11.40	13.80
11	6.00	8.40	22	12.60	14.40

							GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	GYA 东莞市国亚电子有限公司 Dong Guan Guo Ya Connectors co., Ltd.				PART NO. 0600WRS-XXHF-LPV01			
							APPROVAL Yangzhengguo	CHECK Yangzhengyi	DRAWN Lvtiansheng	DATA 2016/08/26	TITLE 0.60mm IDC Style Connectors				
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT	UNIT	SCALE	NUMBER	REV				
1			2				①	MM	1 : 1	A-172	A0				